

General Finish Notes

- A. FLOORS IN RESTROOMS SHALL HAVE A SMOOTH, HARD NONABSORBENT SURFACE SUCH AS PORTLAND CEMENT, CERAMIC TILE, CONCRETE, OR OTHER APPROVED MATERIAL WHICH EXTENDS UPWARD ONTO THE WALLS AT LEAST 6 INCHES.
- B. PROVIDED WATER-RESISTANT GYPSUM BOARD, GREEN BOARD, OR OTHER APPROVED MATERIAL ON THE WALLS IN RESTROOMS.
- C. WALLS IN RESTROOMS WITHIN 2 FEET OF THE FRONT AND SIDES OF URINALS AND WATER CLOSETS SHALL HAVE A SMOOTH, HARD NONABSORBENT SURFACE TO A HEIGHT OF 4 FEET.
- D. TRANSITIONS BETWEEN MATERIALS TO BE WITH SCHLUTER THIN BRUSHED CHROME METAL TRIM - MAXIMUM 1/8" TOLERANCE BETWEEN ELEVATIONS OF FINISHED MATERIALS NO RAISED RUBBER/VINYL NOSINGS OR TRIM THIS PROJECT
- E. FLOOR TRANSITIONS AT DOORWAYS TO BE MADE AT CENTERLINE OF DOOR SLAB.
- F. CONTRACTOR TO PROVIDE FULL SIZE SAMPLE OF FLOOR FINISH MATERIAL FOR CLIENTS FINAL APPROVAL PRIOR TO ORDERING OR INSTALLATION. CONTRACTOR TO RECEIVE APPROVAL IN WRITING.

Finish Symbol Legend

- ↔ INDICATES FLOOR TRANSITION CHANGE OF MATERIAL. CHANGE TO BE SCHLUTER SCHIEN OR DECO, BRUSHED FINISH
- INDICATES DIRECTION OF FLOOR PLANK
- INDICATES PATTERN OF TILE

Wall Finishes

PAINT LEGEND

- P1 DUNN EDWARDS - T.B.D. EGGSHELL - FIELD 70%
- P2 DUNN EDWARDS - T.B.D., EGGSHELL - FIELD ACCENT 20%
- P3 DUNN EDWARDS - T.B.D., EGGSHELL - ACCENT 10%

APPLICATIONS

- VR1 VENEER TREEFROG WALNUT BURL 60403
SEE PAINT CHART AND ELEVATIONS
- VR2 VENEER QUARTZITE TILE WALL
DESIGNER TO PROCURE
- WP1 WALLPAPER MDC - GRASS CLOTH
DESIGNER TO PROCURE
- WP2 WALLPAPER MAP - T.B.D.
- MR1 MURAL WAVE DESIGN, WITH GLASS TO 48", EASED EDGE
- MR2 MURAL TREASURE ISLAND DESIGN
- WC1 TILE EMSER TILE - VELOCITY - 17X35 PLANK
COLOR PULSE
INSTALL CHEVRON PATTERN - SEE ELEVATION
CAP SCHLUTER TRIM DECO/SIENE 3/8"
GROUT CBP UNSAUNDED
- WC2 PLASTIC PROVIDED BY DESIGNER

Floor Finishes


- CP1 CARPET PHILADELPHIA COMMERCIAL IMMERSE J0187 - 24X24 TILE
COLOR PONDER 87210 /
INSTALL BRICK ASHLAR
BASE 4" COORDINATING CARPET BASE, SCHLUTER TRIM - DECO
- CP2 CARPET MANNINGTON COMMERCIAL SPATIAL FADE - 24X24 TILE
COLOR MIDNIGHT 35718
INSTALL BRICK ASHLAR
BASE 4" COORDINATING CARPET BASE, SCHLUTER TRIM - DECO
- TL1 TILE EMSER TILE - DOWNTOWN - 6X35 PLANK
COLOR MAIN
INSTALL BRICK SET
BASE 6" MATCH FLOOR
- TL2 TILE EMSER TILE - CITADEL - 12X24
COLOR GRAY
INSTALL STACKED SET
BASE 6" MATCH FLOOR
- TL3 TERRAZO 24X24
COLOR TBD
INSTALL MONOLITHIC
BASE 6" MATCH FLOOR

Casework Finishes

- G1 TRANSACTION COUNTER CORIAN DESIGNER WHITE
EDGE EASED EDGE
COUNTER TOP FORMICA MOJAVE 8751-58
UPPER/LOWER CABINETS FORMICA STRAIGHT
PULLS FORMICA SCULPTED WHITE 949-SP
SPECIALTY FRONT RESIN WAVE DESIGN 3FORM CHROMA POOL
- G12 TRANSACTION COUNTER CAMBRIA PRAA SANDS
EDGE EASED EDGE
COUNTER TOP FORMICA FLAX GAUZE 7708
UPPER/LOWER CABINETS FORMICA STRAIGHT
PULLS FORMICA WHEAT STRAND 6212-58
SPECIALTY DIVIDER LUMICOR COASTAL FADE
- G13 COUNTER TOP CORIAN DESIGNER WHITE
EDGE EASED EDGE
LOWER CABINETS FORMICA SCULPTED WHITE 949-SP
- G14 COUNTER TOP WILSONART KHAKI BROWN D50
EDGE STRAIGHT
UPPER/LOWER CABINETS FORMICA SCULPTED WHITE 949-SP
PULLS STANDARD WIRE
- G15 COUNTER TOP SILESTONE PLATINUM
EDGE STRAIGHT
LEGS/BASE FORMICA CHESTNUT 5884-58
SEE ELEVATIONS, LAMINATE OVER FRAMED LEGS
- G16 COUNTER TOP FORMICA WHITE 949-58
EDGE STRAIGHT
UPPER/LOWER CABINETS FORMICA SCULPTED TROPICAL BLUE F2828-SP
PULLS STANDARD WIRE
- G17 COUNTER TOP WILSONART KHAKI BROWN D50
EDGE STRAIGHT
UPPER/LOWER CABINETS WILSONART SAVAGE PLANKS 9480
PULLS STANDARD WIRE
- G18 COUNTER TOP CORIAN ALMOND PEARL
EDGE STRAIGHT
UPPER/LOWER CABINETS FORMICA WHEAT STRAND 6212-58
PULLS STANDARD WIRE
- G19 COUNTER TOP WILSONART KHAKI BROWN D50
EDGE STRAIGHT
UPPER/LOWER CABINETS FORMICA WHEAT STRAND 6212-58
PULLS STANDARD WIRE

Miscellaneous Finishes

- DOOR FINISH**
DOOR MANUFACTURER - HALEY ARCHITECTURAL DOORS
VENEER - ROTARY WHITE BIRCH SELECT MAPLE
FINISH - PAINTED/STAINED
COLOR - T.B.D.
- FRAME FINISH**
FRAME MANUFACTURER - TIMELY
STYLE - TA-30 STEEL
COLOR - T.B.D.
- HARDWARE FINISH**
LEVERS - BRUSHED SATIN
HINGES - BRUSHED SATIN
DOORSTOPS - BRUSHED SATIN
CLOSERS - BRUSHED SATIN
- ELECTRICAL TRIM**
COVER PLATES - WHITE
OUTLETS - DECORA - WHITE
SWITCHES - DECORA - WHITE

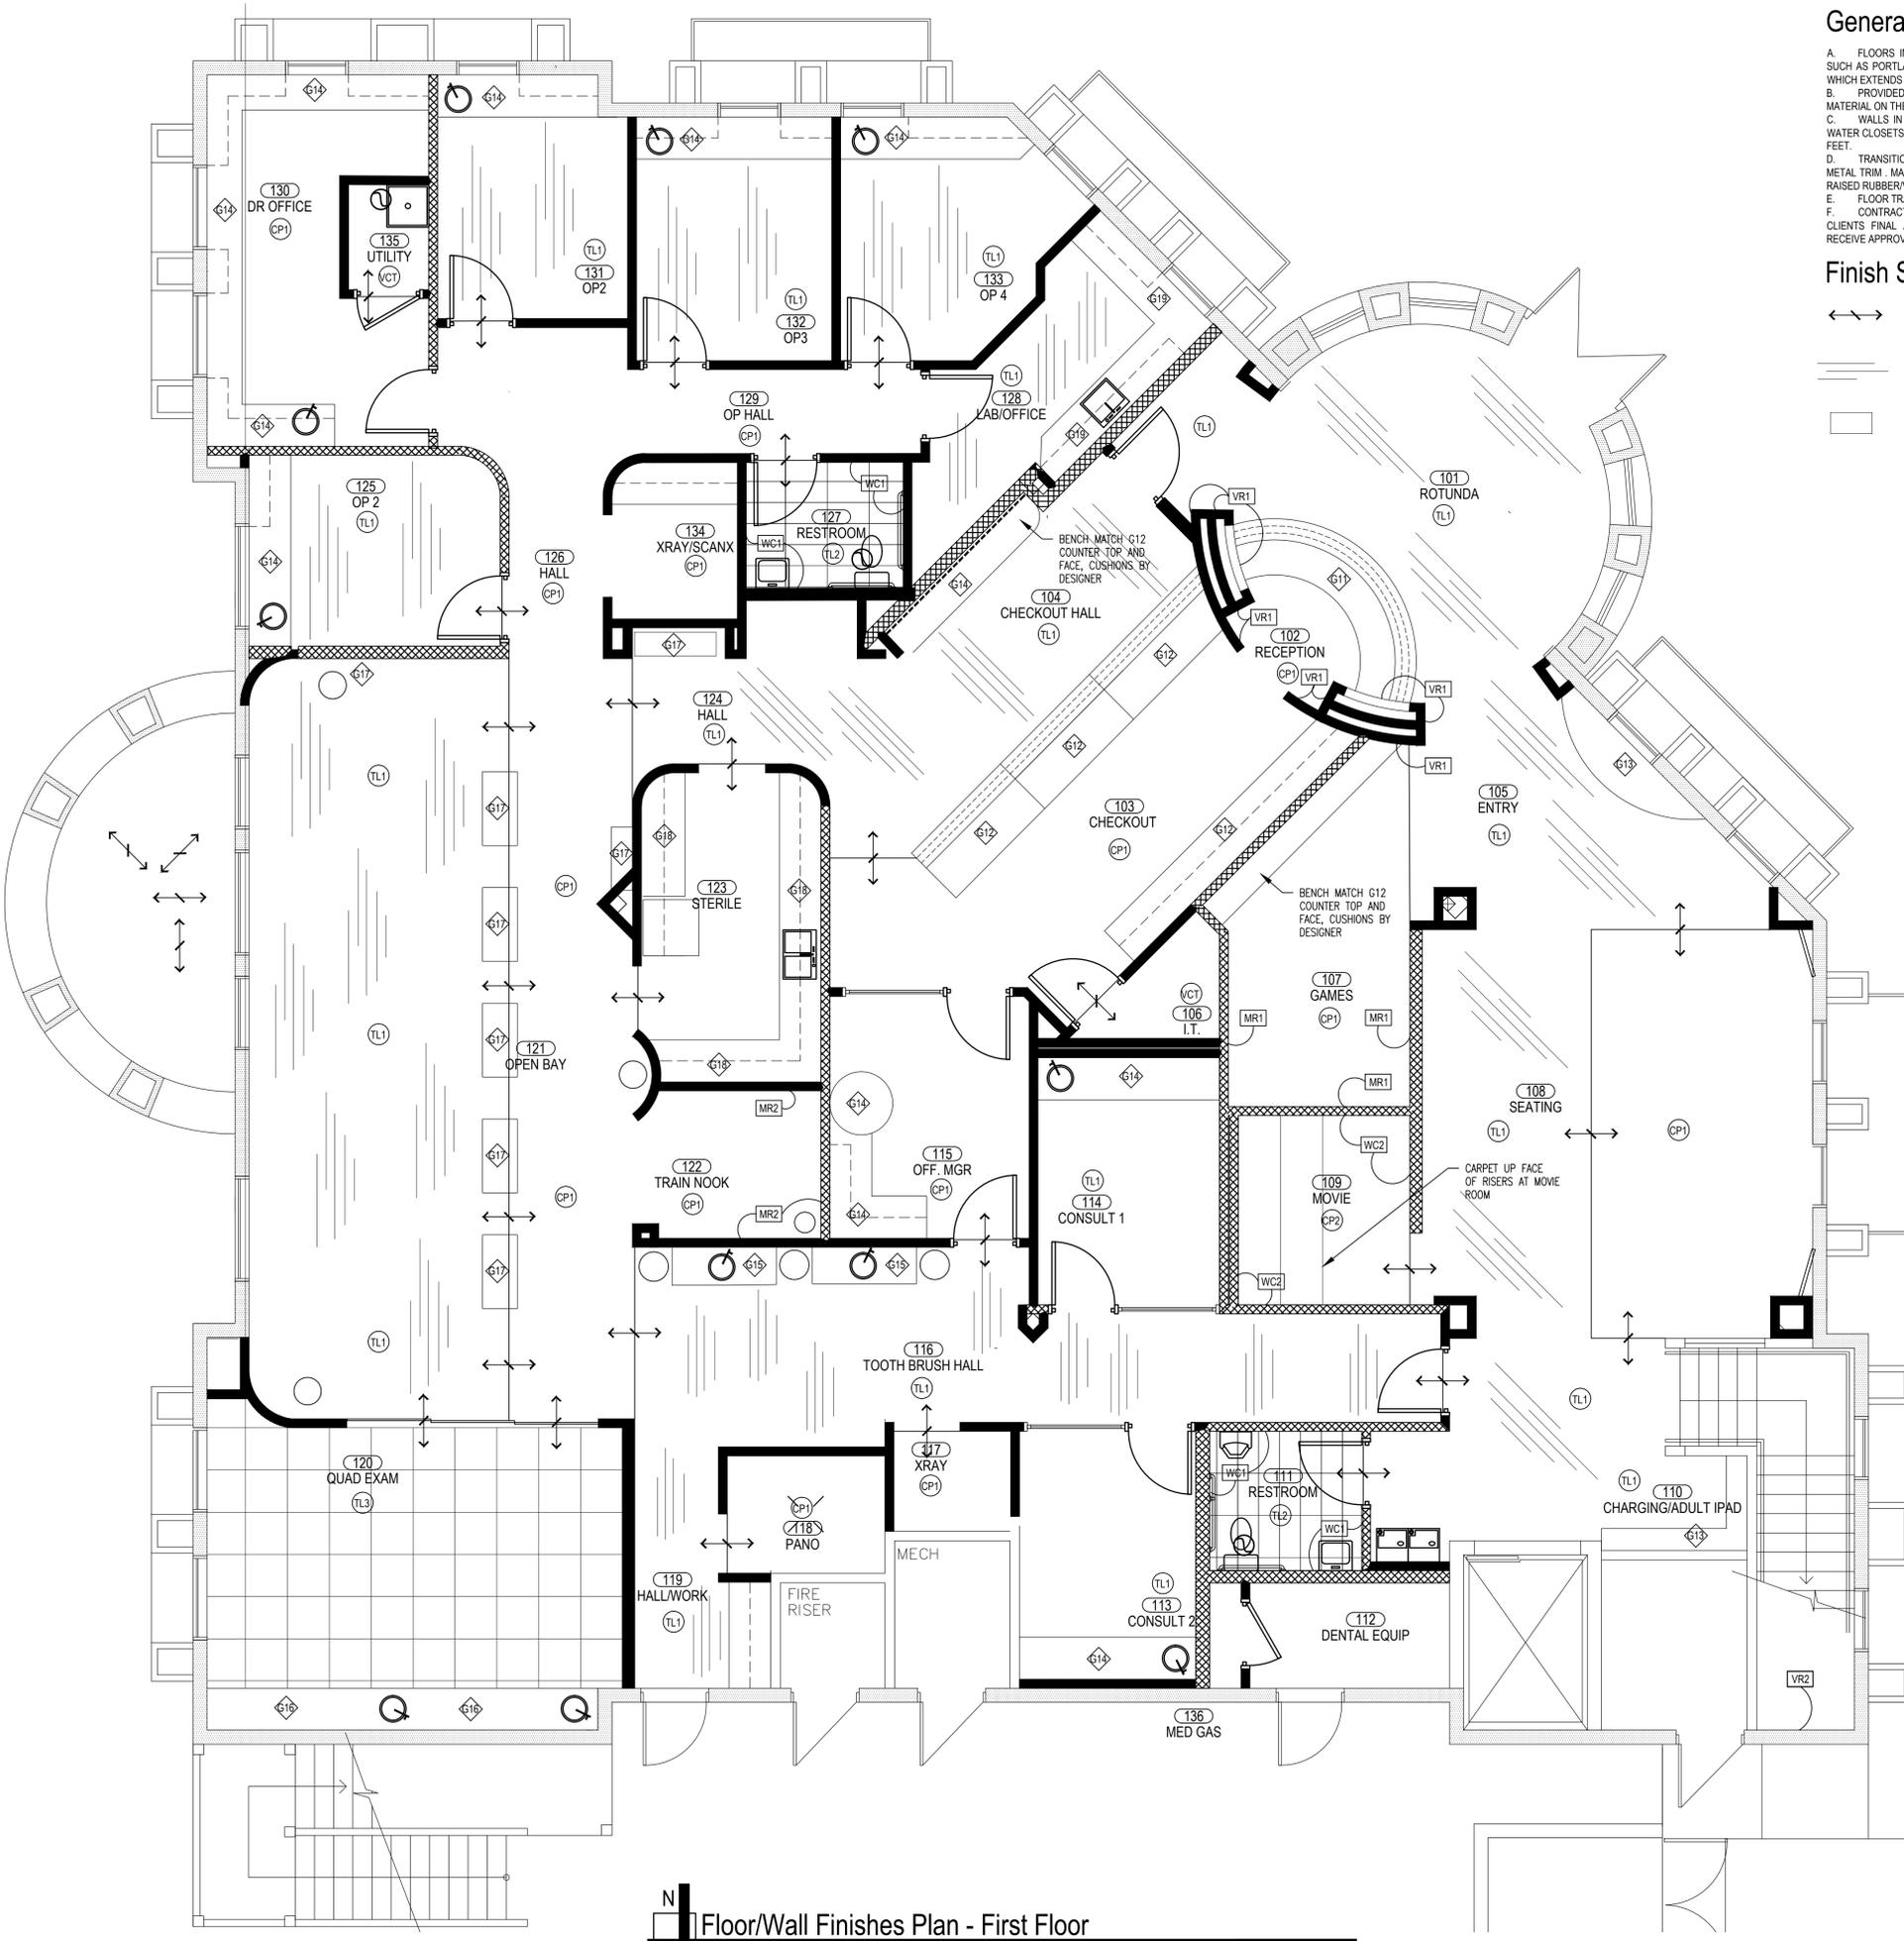

Floor/Wall Finishes Plan - First Floor
1/4" = 1'-0"